

"UNPARALLELED PERFORMANCE AND SAFETY UNDER PRESSURE!"[®]



SelectForm[®]


Model 400 Series End Forming Tools

- Pressures up to 3,000 psi (207 bar)
- 0.19 in. to 1.38 in. OD (4.7 mm to 35.0 mm OD)
- Pressure-compensated design
- Expand, reduce, bead, or flare tube ends
- Precision-machined stainless steel construction

DESCRIPTION

The patented SelectForm[®] Model 400 Series End Forming Tool is a dedicated, hand-held tool that accurately expands, reduces, beads, or flares a single shape on the end of tube diameters from 0.19 in. to 1.38 in. (4.7 mm to 35.0 mm). These tools utilize two quick disconnects for easy connection to hydraulic power pack. When combined with the SelectForm[®] Model 400 Hydraulic Power Pack, the tool is simply placed over the tube end and the operator presses a foot switch on the power source. The tool cycles automatically, producing a finished form in 2 to 5 seconds.

COMMON END FORMS

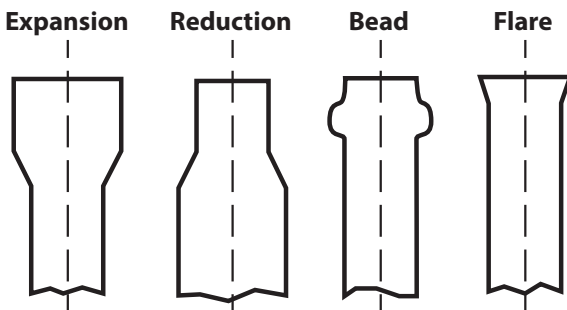

MODEL 400 DEDICATED END FORMING TOOLS

Model Number	End Form Shape
400	Tube Expansion
401	Hydraulic Ball Inserter
402	Tube Reduction
403	Bead Form
437	37° S.A.E. Flare
445	45° S.A.E. Flare

APPLICATION

The SelectForm[®] Model 400 Series End Forming Tools are used to produce a specific end form on tubes for manufacturing applications in a variety of industries, including: aerospace and aircraft, boiler, heat exchanger and radiator, military, nuclear and hydro-electric, metal furniture, on/off road mobile vehicles, outdoor power equipment, plumbing fittings, sports equipment, boat and water craft, tube and pipe manufacturing.

TOOL CONFIGURATION

Grip: On tube OD
Actuation: Hydraulically-operated extend and retract

OPERATING CONDITIONS

Maximum Pressure: 3,000 (207 bar)
Temperature: 32° F to 120° F (0° C to 49° C)
Tube OD Range: 0.19 in. to 1.38 in.
(4.7 mm to 35.0 mm)
Expansion Length: Up to 3 x tube OD, depending on application
Expansion: <20% of the Tube OD*
Reduction Length: Up to 3 x tube OD, depending on application
Reduction: <20% of the Tube OD*
Flare: 37° and 45°
Wall Thickness: Standard tubing
Materials: Aluminum, carbon steel, copper, stainless steel, and titanium

* Actual expansion range may vary depending on material, please check with Airmo for details.


MAXIMUM PRESSURE
4,000 psi
276 bar

SelectForm®
Model 400 Series
End Forming Tools

Model 400 Series Tool End Forms




Model 400 Tool - Expansion



Model 401 Tool - Ball Inserter



Model 402 Tool - Reduction



Model 403 Tool - Bead



Model 437 Tool - Flare

Special Configurations Available Upon Request

FEATURES

- Fast operation, cycles in 2 to 5 seconds
- Pressure-compensated design
- Low marking collet design
- Compact, balanced design
- Precision-machined from heat-treated stainless steel
- Low maintenance
- Designed for use with SelectForm® Hydraulic Power Pack

BENEFITS

- Increases productivity and throughput
- Contains all high-pressure loads for safe operation
- Prevents tube end collapse and eliminates scrap
- Reduces operator fatigue
- Provides long, trouble-free service
- No lubrication required for most applications
- Transport portable system and tooling to job site



AIRMO, INC. 9445 Evergreen Blvd. NW, Minneapolis, MN 55433-5840 USA

PHONE: 1(763) 786-0000 or 1(800) 394-0016 | FAX: 1(763) 786-4622 | EMAIL: airmo@airmo.com | WEBSITE: www.airmo.com

S116.E.0520 © 2020 All Rights Reserved. Contents subject to change. All trademarks are the property of their owners.